



Architecture overview

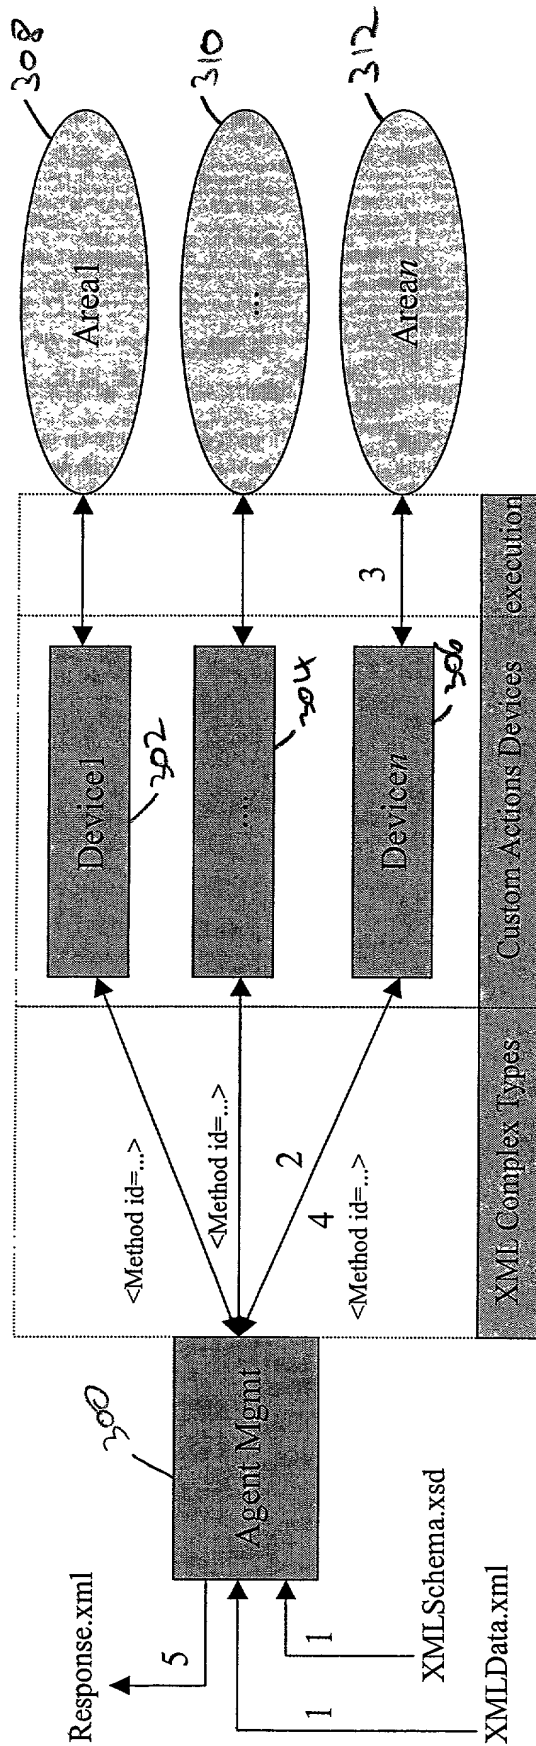


- 1) Request XML file is passed to Agent Mgmt containing complex types
Agent Mgmt splits the data into parts and hands the <Method> over to the corresponding Custom Actions Devices
- 2) The complex type <Method> describes the method to execute and its parameters
- 3) Custom Actions Devices execute the functions in a certain area they are responsible for and pack the result into XML complex types
- 4) Complex types containing result data are returned to Agent Mgmt
- 5) XML stream has been packed and is returned

Fig. 1

Li²⁺

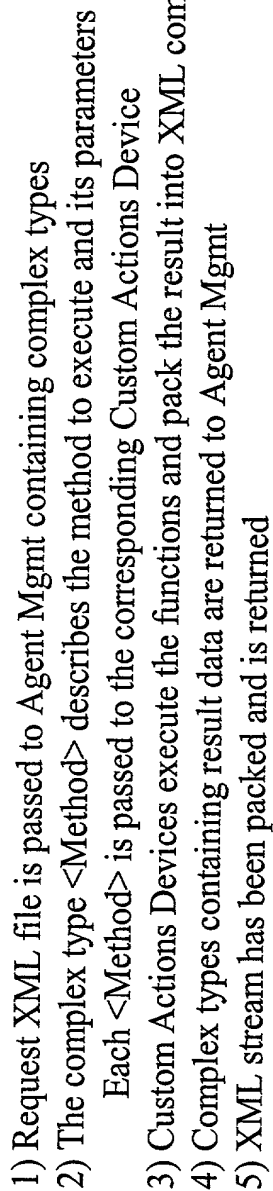

Deploying Configuration Data

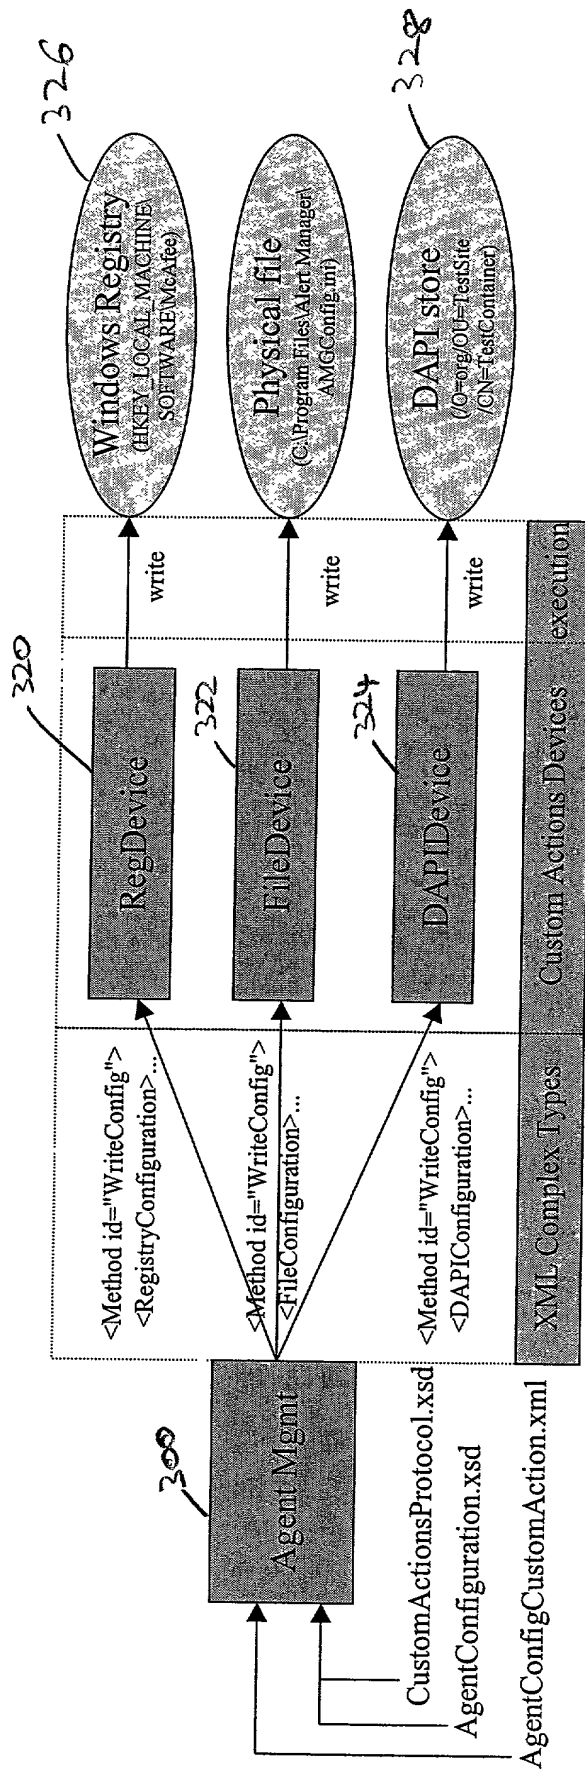

- 1) Agent Mgmt receives AgentConfigCustomAction.xml
- 2) .xml file is validated against .xsd file(s) to make sure valid data is written
- 3) XML Complex types are sent to Custom Actions Devices, the parameters containing the configuration data
- 4) Custom Actions Devices update the config store they are responsible for
- 5) Optionally a return value can be returned as a Response.xml file

Fig. 3

Retrieving Configuration Data

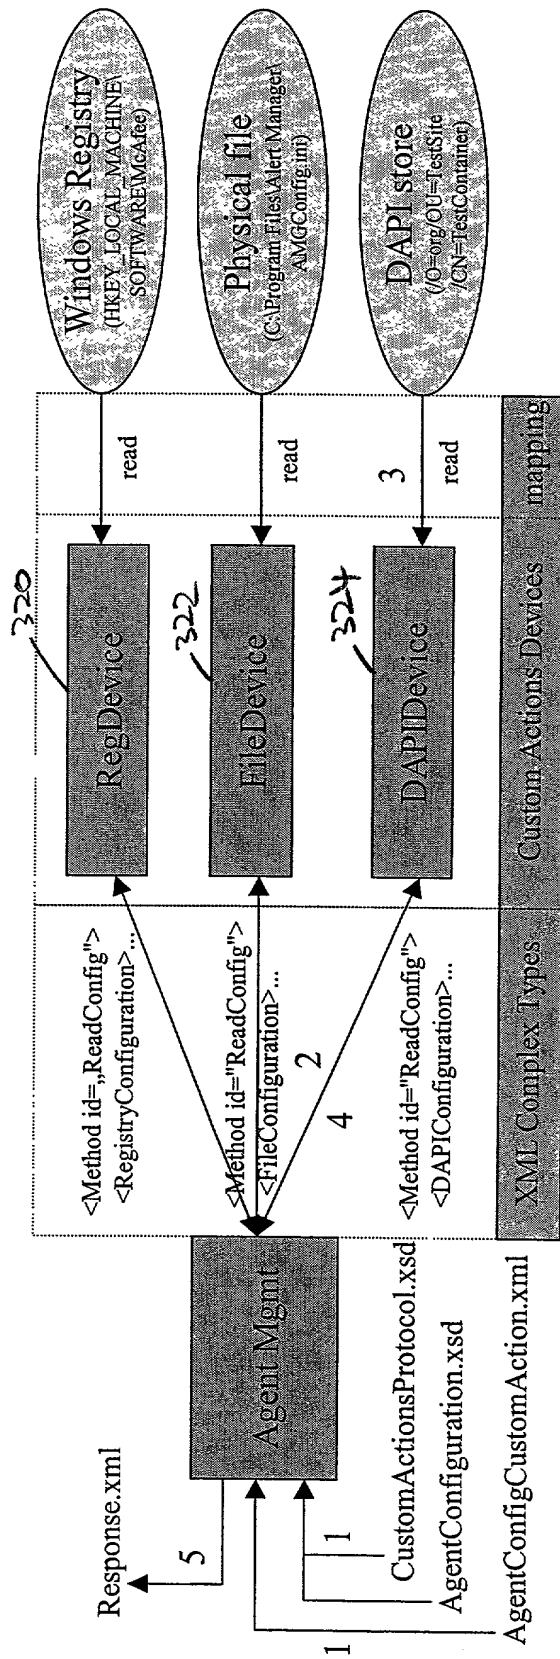


Fig. 4

Initiator

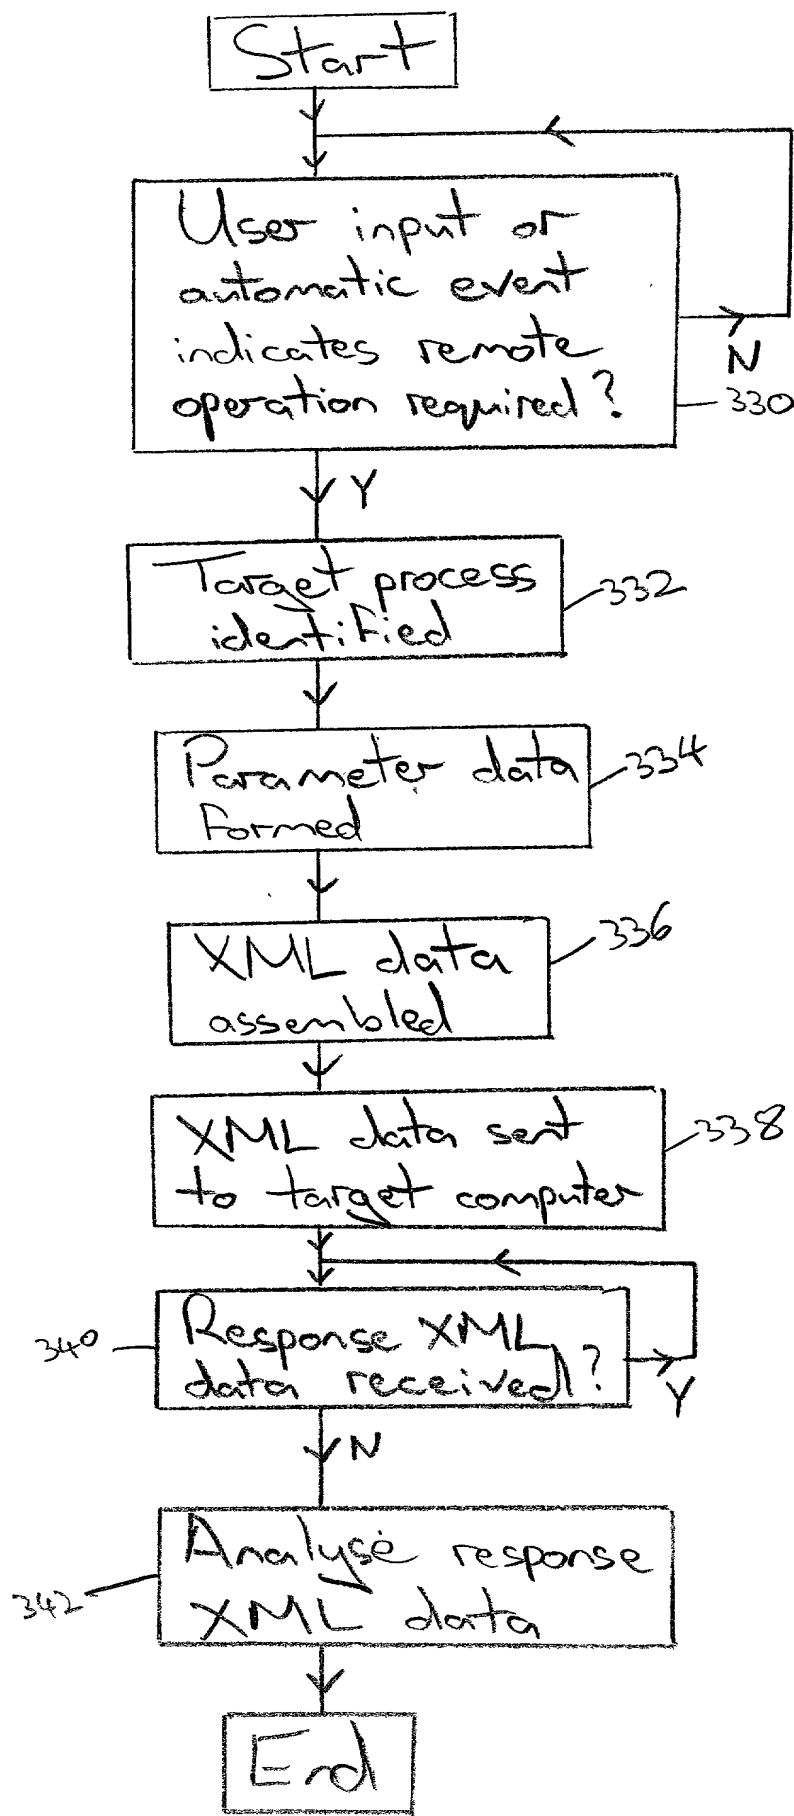


Fig. 5

10091415.030702

Agent


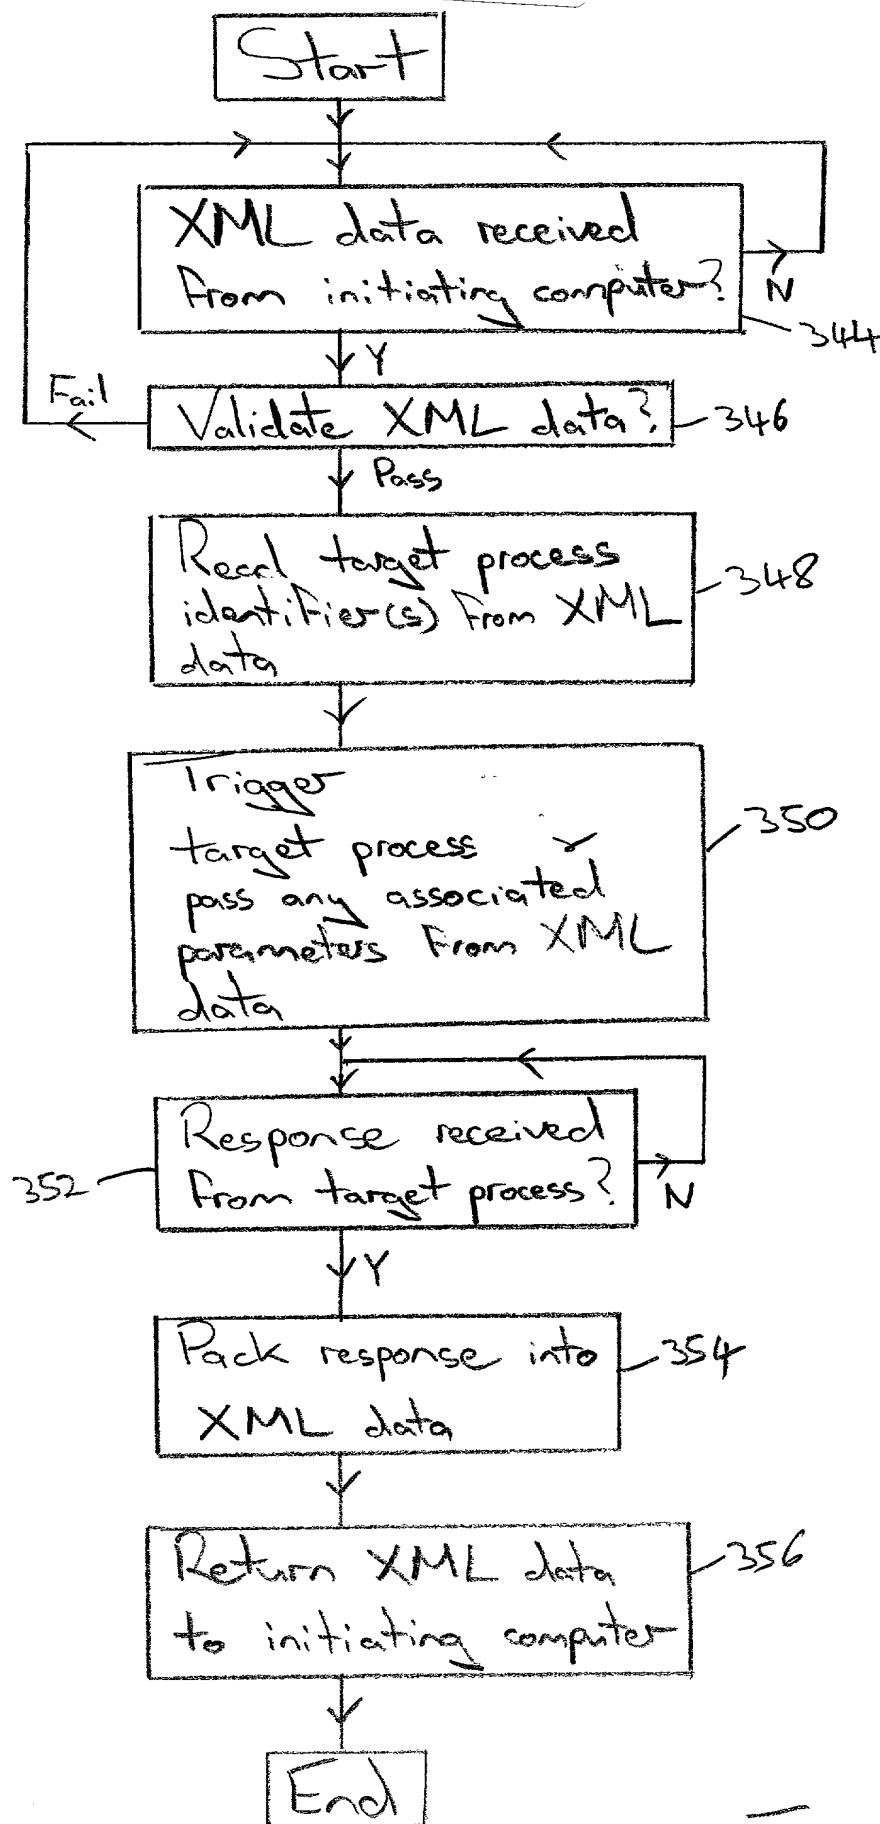


Fig. 6

10091415.030702
20200815

Target

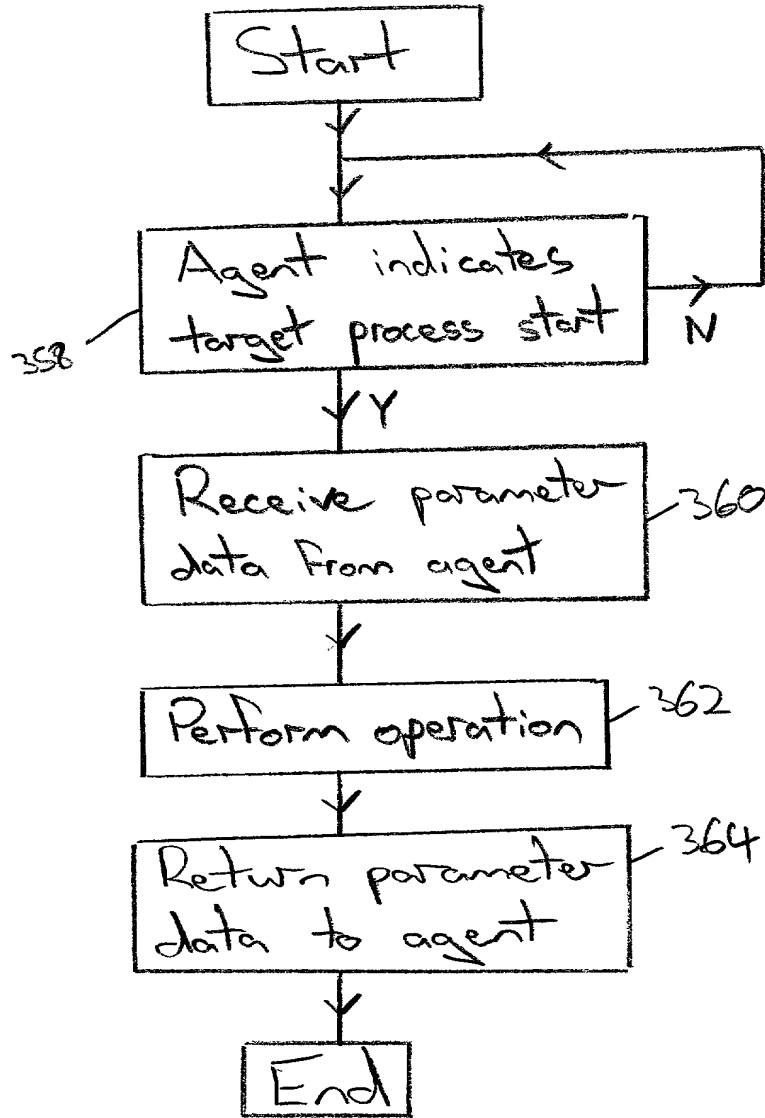

10691415.030702

Fig. 7


Fig. 8

Protocol Specification

<ControlData>	contains Agent specific control data like version information, the command to execute and computer information sending the custom actions information.
<Command>	the command field could be used to easily determine if data is going to be retrieved (RequestCustomAction) or returned after the action has been executed (RespondToCustomAction) - optional.
<Server>	computer information of the sender. If the Agent is able to process requests in parallel and asynchronously, this information is useful. The simplest form of this field contains the computer name.
<CustomActions>	any number of custom action COM servers or dlls or executeables required for the tasks are listed within the CustomActions.
id	the id specifies a CLSID if the custom action method is contained in a COM server or the path to a dll/exe file if a library or an executable implements the method to execute. If a CLSID is specified, the following <Interface> complex type is required to specify the interface of the COM server containing the method to execute. Otherwise <Interface> is not required and any number of <Method> types follow immediately.
<Interface>	only required if the <Method> is implemented in a COM server.
id	the interface identifier of the COM server (IID).
<Method>	any number of Methods implemented in the custom action device.
id	the Method name. In case of a COM server, this is the method name of the COM interface, else this denotes the name of an exported function or e.g. a command line parameter of an executable.
<Parameter>	any number of parameters required for the method. This includes requested out parameters, which are listed, but don't contain data and inout parameters which have a different value on response than on request.
id	the name of the parameter.
type	can be any standard XML datatype.
inout	possible values are 'in', 'out' and 'inout'. Specifies if the parameter is requested, passed to the function or passed to the function for modification.
<any>	any other non standard XML datatype can follow.

Fig. 9

202005041600F

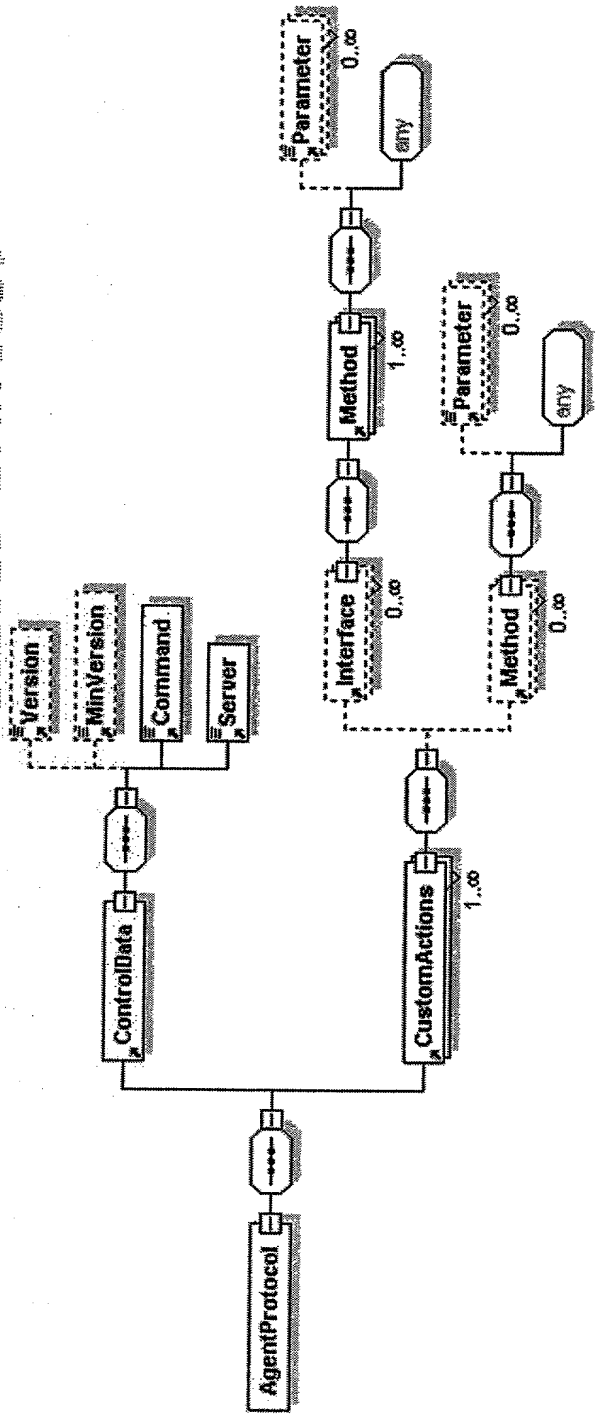

Custom Actions Protocol.xsd

<?xml version="1.0" ?>

- <AgentProtocol xmlns="http://www.nai.com"
 - xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 - xsi:schemaLocation="http://www.nai.com CustomActionsProtocol.xsd">
- <ControlData>
 - <Version>0x01000001</Version>
 - <MinVersion>0x01000001</MinVersion>
 - <Command>RequestCustomAction</Command>
 - <Server>ned1wnts2ke</Server>
- </ControlData>
- <CustomActions>
 - id="<AGENT_INSTALLED_DIR>\\CustomActionsLibrary\\CustAct1.dll">
 - <Method id="GetRegStringValue">
 - <Parameter id="Key" type="xs:string"
 - inout="in"><AGENT_INSTALLED_REGKEY></Parameter>
 - <Parameter id="Valuename" type="xs:string"
 - inout="in">AgentVersion</Parameter>
 - <Parameter id="Result" type="xs:string" inout="out" />
 - </Method>
- </CustomActions>
- <CustomActions id="{06E0062A-5069-4793-ACED-F80BE1BBC4AF}">
- <Interface id="{C9E1CC03-8007-412A-8F5D-532C57DF4482}">
- <Method id="ExecuteSilentInstallation">
 - <Parameter id="ProductName" type="xs:string"
 - inout="in">TestInstallProduct</Parameter>
 - <Parameter id="ProductVersion" type="xs:decimal"
 - inout="in">0x01000001</Parameter>
 - <Parameter id="Location" type="xs:string"
 - inout="in">c:\InstallImages</Parameter>
 - <Parameter id="Result" type="xs:string" inout="out" />
- </Method>
- </Interface>
- <Interface id="{C9E1CC03-8007-412A-8F5D-532C57DF4482}">
- <Method id="GetSystemDirectory">
 - <Parameter id="Directory" type="xs:string" inout="out" />
 - <Parameter id="Result" type="xs:decimal" inout="out" />
- </Method>
- </Interface>
- </CustomActions>
- <CustomActions id="{06E0062B-5069-4793-ACED-F80BE1BBC4AF}">
- <Interface id="{A000CC03-8007-412A-8F5D-532C57DF4482}">
- <Method id="TriggerEvent">
 - <Parameter id="EventID" type="xs:decimal"
 - inout="in">1000</Parameter>
 - <Parameter id="EventDescription" type="xs:decimal"
 - inout="in">The event %EventID% has been triggered by %
USERNAME% on computer %COMPUTERNAME%. The %
FILENAME% file is infected with %VIRUSNAME%. This has
been detected by engineversion %ENGINEVERSION%
datversion %DATVERSION%.</Parameter>
 - <Parameter id="COMPUTERNAME" type="xs:string"
 - inout="in">sourcecomputer</Parameter>
 - <Parameter id="USERNAME" type="xs:string"
 - inout="in">sourceuser</Parameter>
 - <Parameter id="FILENAME" type="xs:string"
 - inout="in">kernel32.dll</Parameter>
 - <Parameter id="VIRUSNAME" type="xs:string"

Fig. 10A

20/02/2015 14:45:03

```
inout="in">Nimbda</Parameter>
  <Parameter id="ENGINEVERSION" type="xs:decimal"
    inout="in">0x04005001</Parameter>
  <Parameter id="DATVERSION" type="xs:decimal"
    inout="in">0x07003009</Parameter>
  <Parameter id="Result" type="xs:string" inout="out" />
</Method>
</Interface>
</CustomActions>
</AgentProtocol>
```

20/09/2015 10:09:45


Fig. 10B

<?xml version="1.0" ?>

- <AgentProtocol xmlns="http://www.nai.com"
 - xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 - xsi:schemaLocation="http://www.nai.com CustomActionsProtocol.xsd">
 - <ControlData>
 - <Version>0x01000001</Version>
 - <MinVersion>0x01000001</MinVersion>
 - <Command>RespondToCustomAction</Command>
 - <Server>ned1wnts2ke</Server>
 - </ControlData>
 - <CustomActions
 - id="<AGENT_INSTALLED_DIR>\\CustomActionsLibrary\\CustAct1.dll">
 - <Method id="GetRegStringValue">
 - <Parameter id="Result" type="xs:string"
 - inout="out">5.0.1.10</Parameter>
 - </Method>
 - </CustomActions>
 - <CustomActions id="{06E0062A-5069-4793-ACED-F80BE1BBC4AF}">
 - <Interface id="{C9E1CC03-8007-412A-8F5D-532C57DF4482}">
 - <Method id="ExecuteSilentInstallation">
 - <Parameter id="Result" type="xs:string" inout="out">Error: Invalid Image path specified.</Parameter>
 - </Method>
 - </Interface>
 - <Interface id="{C9E1CC03-8007-412A-8F5D-532C57DF4482}">
 - <Method id="GetSystemDirectory">
 - <Parameter id="Directory" type="xs:string"
 - inout="out">C:\Winnt\System32</Parameter>
 - <Parameter id="Result" type="xs:decimal"
 - inout="out">0</Parameter>
 - </Method>
 - </Interface>
 - </CustomActions>
 - <CustomActions id="{06E0062B-5069-4793-ACED-F80BE1BBC4AF}">
 - <Interface id="{A000CC03-8007-412A-8F5D-532C57DF4482}">
 - <Method id="TriggerEvent">
 - <Parameter id="Result" type="xs:string" inout="out">Event sent to testcomputer2</Parameter>
 - </Method>
 - </Interface>
 - </CustomActions>
- </AgentProtocol>


Fig. 11

FIG. 12

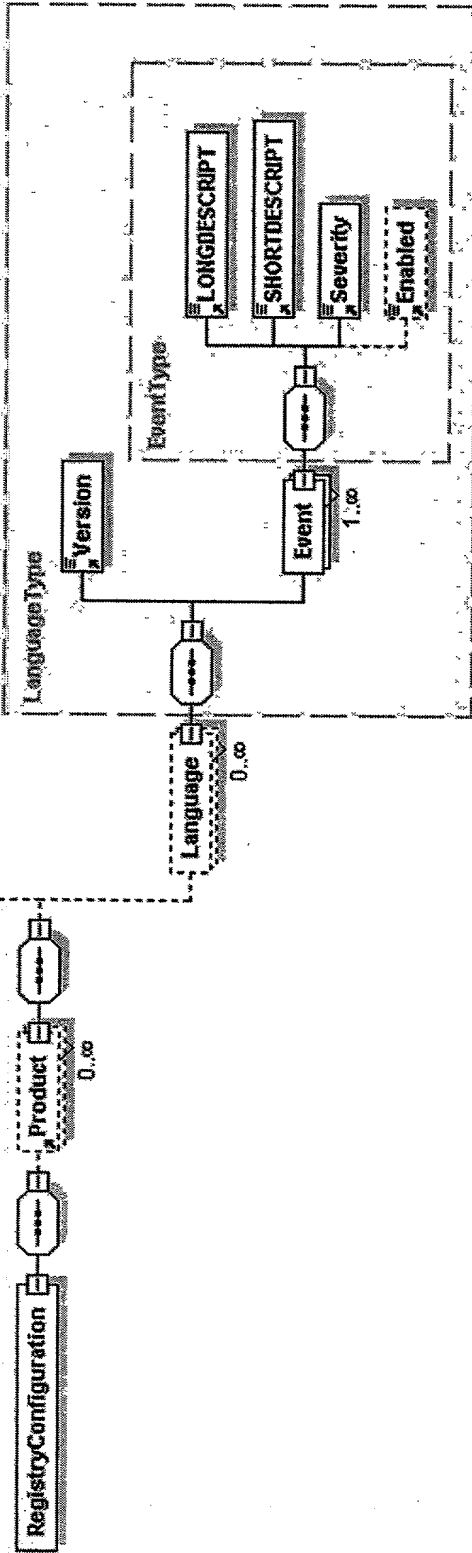

AgentConfiguration.xsd - RegistryConfiguration


Fig. 12

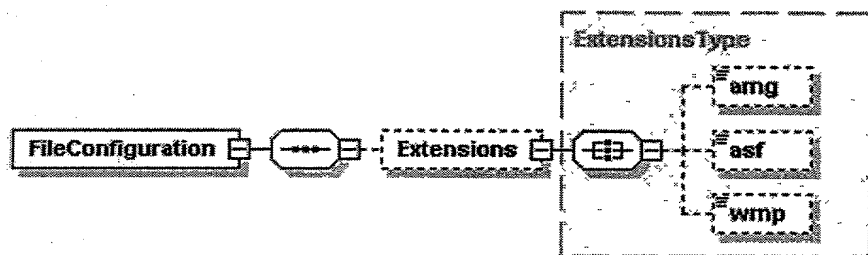

Agent Configuration.xsol - File Configuration

20080514 15:03:00

Fig. 13



AgentConfiguration.xsd - DAPIConfiguration

10091415.030702

Fig. 14

```
- <AgentProtocol xmlns="http://www.nai.com"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.nai.com CustomActionsProtocol.xsd
  http://www.nai.com AgentConfiguration.xsd">
- <ControlData>
  <Version>0x01000001</Version>
  <MinVersion>0x01000001</MinVersion>
  <Command>RequestCustomAction</Command>
  <Server>ned1wnts2ke</Server>
</ControlData>
- <CustomActions id="RegistryMapping.dll">
- <Method id="WriteConfig">
  - <RegistryConfiguration
    id="HKEY_LOCAL_MACHINE\SOFTWARE\McAfee">
  - <Product id="Alert Manager">
    <Version>0x04070000</Version>
    <DisplayName>Alert Manager 4.7</DisplayName>
  - <Language id="0407">
    <Version>0x01000002</Version>
    - <Event id="1">
      <LONGDESCRIPT>Das ist eine Test-Nachricht von Alert
      Manager.</LONGDESCRIPT>
      <SHORTDESCRIPT>Testing</SHORTDESCRIPT>
      <Severity>5</Severity>
      <Enabled>1</Enabled>
    </Event>
  </Language>
  - <Language id="0409">
    <Version>0x01000002</Version>
    - <Event id="1">
      <LONGDESCRIPT>This is an alert manager test
      message.</LONGDESCRIPT>
      <SHORTDESCRIPT>Testing</SHORTDESCRIPT>
      <Severity>0</Severity>
      <Enabled>1</Enabled>
    </Event>
    - <Event id="2">
      <LONGDESCRIPT>Text of event 2.</LONGDESCRIPT>
      <SHORTDESCRIPT>Testing</SHORTDESCRIPT>
      <Severity>1</Severity>
    </Event>
  </Language>
  </Product>
</RegistryConfiguration>
</Method>
- <Method id="ReadConfig">
  <RegistryConfiguration
    id="HKEY_LOCAL_MACHINE\SOFTWARE\McAfee\*" />
</Method>
</CustomActions>
- <CustomActions id="INIFileMapping.dll">
- <Method id="WriteConfig">
  - <FileConfiguration id="C:\Program Files\Alert
  Manager\AMGConfig.ini">
    - <Extensions>
```

Fig. 15A


```
<amg>AMGConfig</amg>
<asf>MPEGVideo</asf>
<wmp>MPEGVideo2</wmp>
</Extensions>
</FileConfiguration>
</Method>
- <Method id="ReadConfig">
  <FileConfiguration id="C:\Program Files\Alert
    Manager\AMGConfig.ini" />
</Method>
</CustomActions>
- <CustomActions id="MAPIMapping.dll">
- <Method id="WriteConfig">
  - <DAPIConfiguration id="/O=org/OU=TestSite/CN=TestContainer">
    <BinaryProperty>0123456789ABCDEF00000</BinaryProperty>
  </DAPIConfiguration>
</Method>
- <Method id="ReadConfig">
  <DAPIConfiguration id="/O=org/OU=TestSite/CN=TestContainer" />
</Method>
</CustomActions>
</AgentProtocol>
```

10091415.030702

Fig. 15B

Source

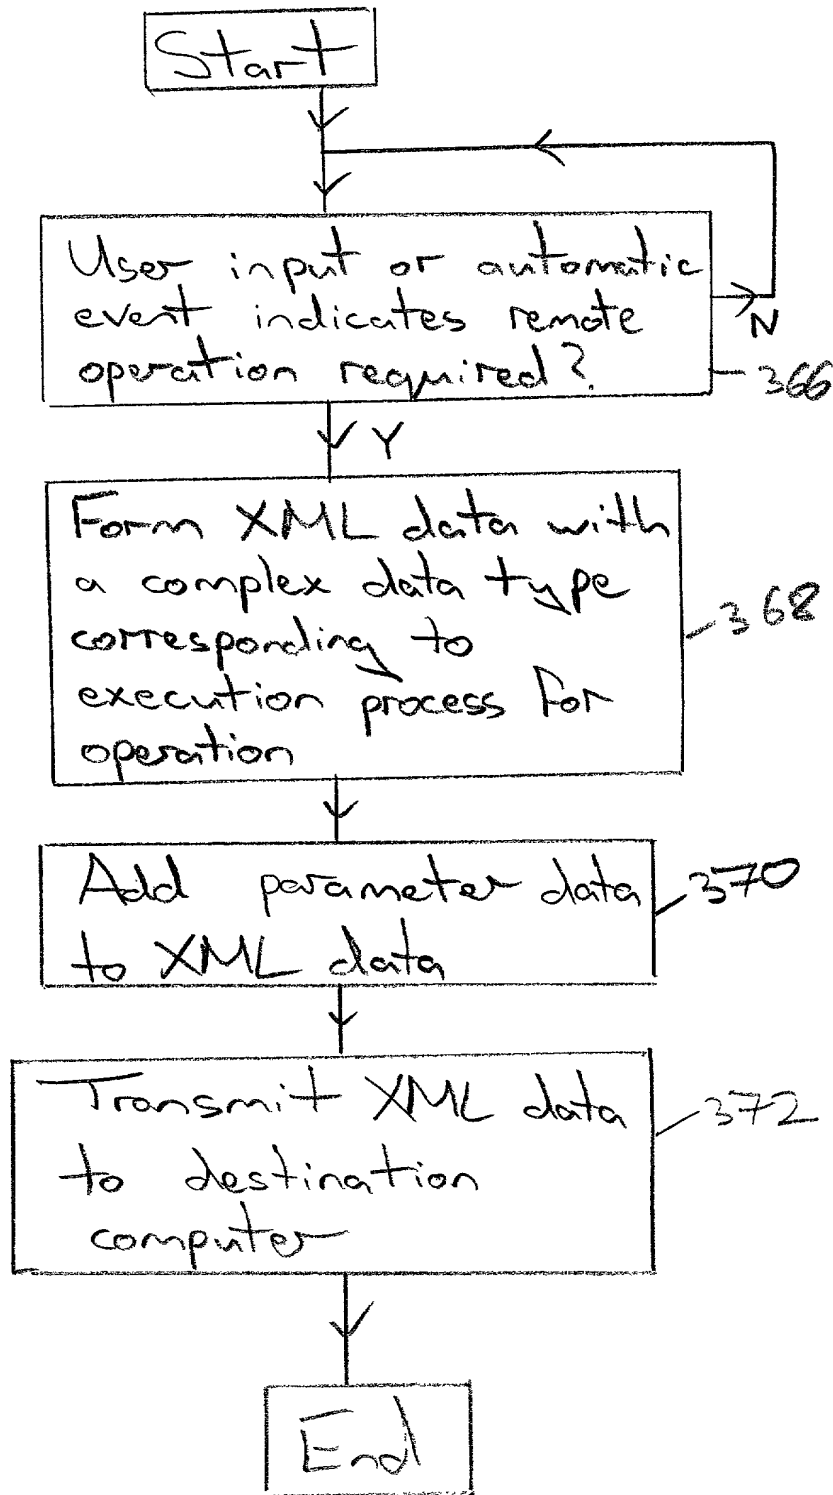


Fig. 16

10091415.030702

Destination



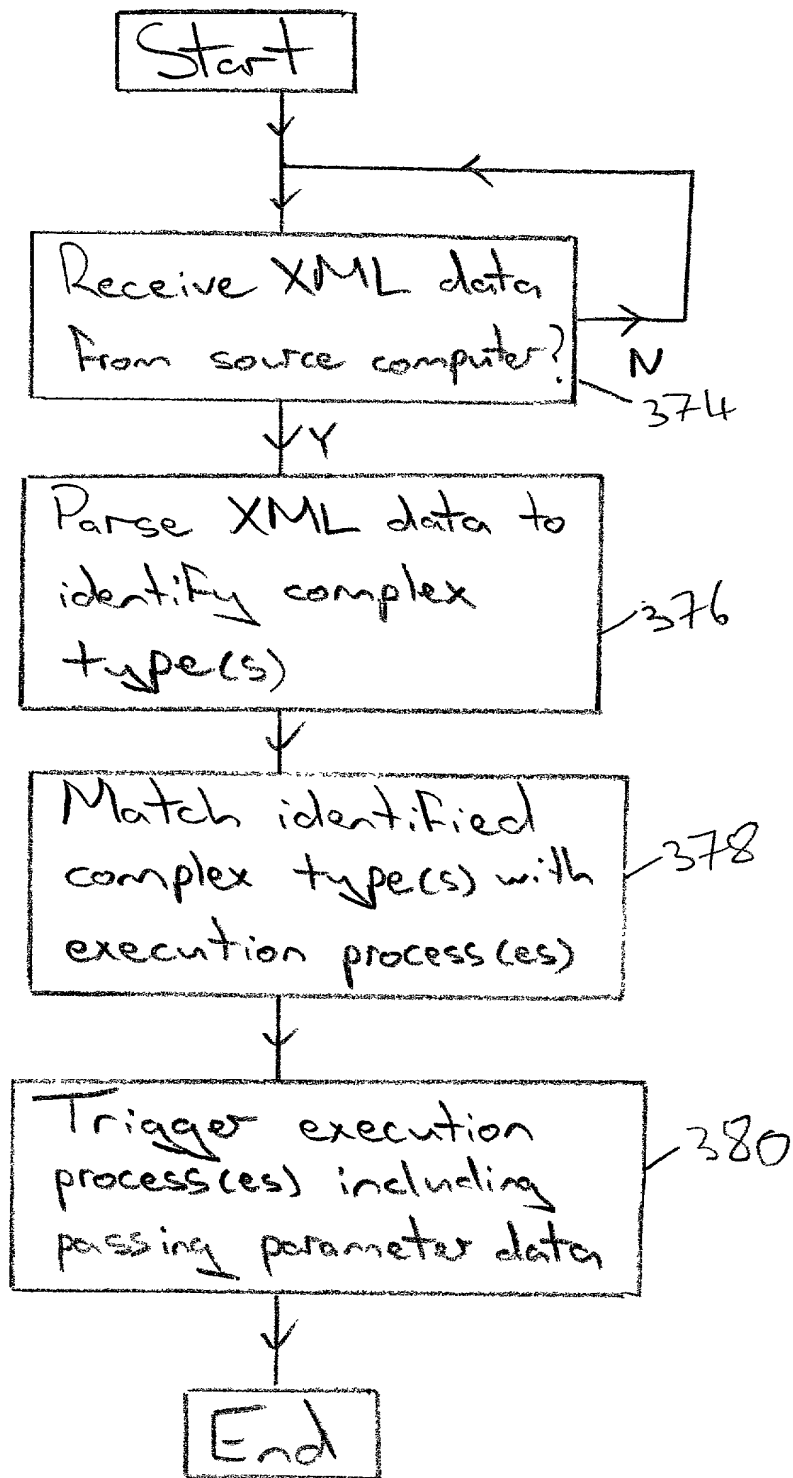


Fig. 17

2020051415.030702

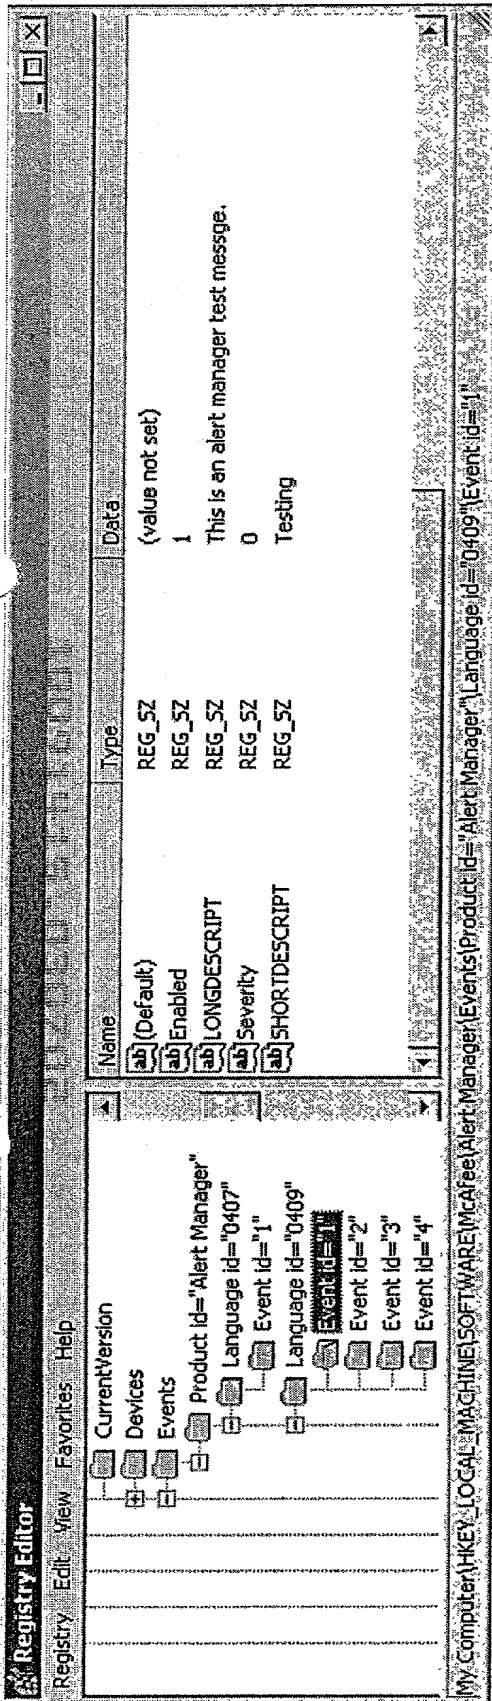

Registry Data
Fig. 18

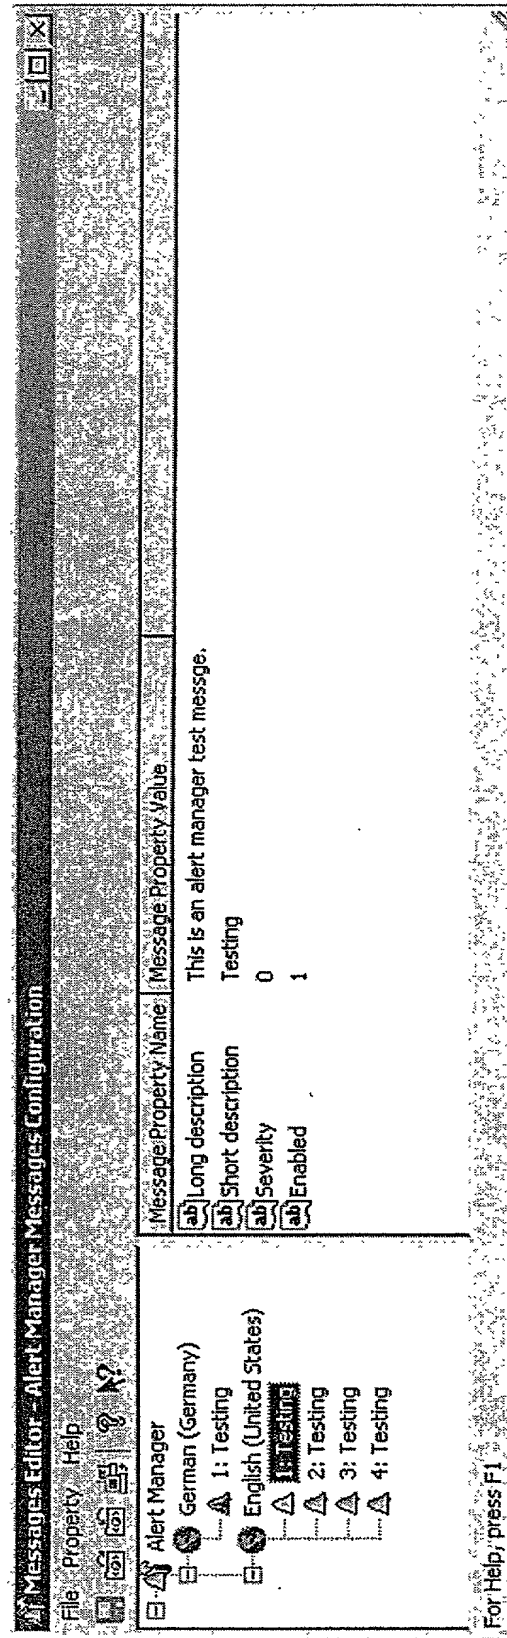


DOM Data View
Fig. 19

<?xml version="1.0" ?>
- <AMGEvents xmlns="http://www.nai.com"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xsi:schemaLocation="http://www.nai.com AMGEvents.xsd">
- <Product id="Alert Manager">
 <Version>0x04070000</Version>
 <DisplayName>Alert Manager 4.7</DisplayName>
- <Language id="0407">
 <Version>0x01000002</Version>
 - <Event id="1">
 <LONGDESCRIPT>Das ist eine Test-Nachricht von Alert
 Manager.</LONGDESCRIPT>
 <SHORTDESCRIPT>Testing</SHORTDESCRIPT>
 <Severity>5</Severity>
 <Enabled>1</Enabled>
 </Event>
 </Language>
- <Language id="0409">
 <Version>0x01000002</Version>
 - <Event id="1">
 <LONGDESCRIPT>This is an alert manager test
 messge.</LONGDESCRIPT>
 <SHORTDESCRIPT>Testing</SHORTDESCRIPT>
 <Severity>0</Severity>
 <Enabled>1</Enabled>
 </Event>
 - <Event id="2">
 <LONGDESCRIPT>Text of event 2.</LONGDESCRIPT>
 <SHORTDESCRIPT>Testing</SHORTDESCRIPT>
 <Severity>1</Severity>
 </Event>
 - <Event id="3">
 <LONGDESCRIPT>Text of event 3.</LONGDESCRIPT>
 <SHORTDESCRIPT>Testing</SHORTDESCRIPT>
 <Severity>1</Severity>
 </Event>
 - <Event id="4">
 <LONGDESCRIPT>Text of event 4.</LONGDESCRIPT>
 <SHORTDESCRIPT>Testing</SHORTDESCRIPT>
 <Severity>1</Severity>
 </Event>
 </Language>
 </Product>
</AMGEvents>

XML Data

Fig. 20

20040905.030703

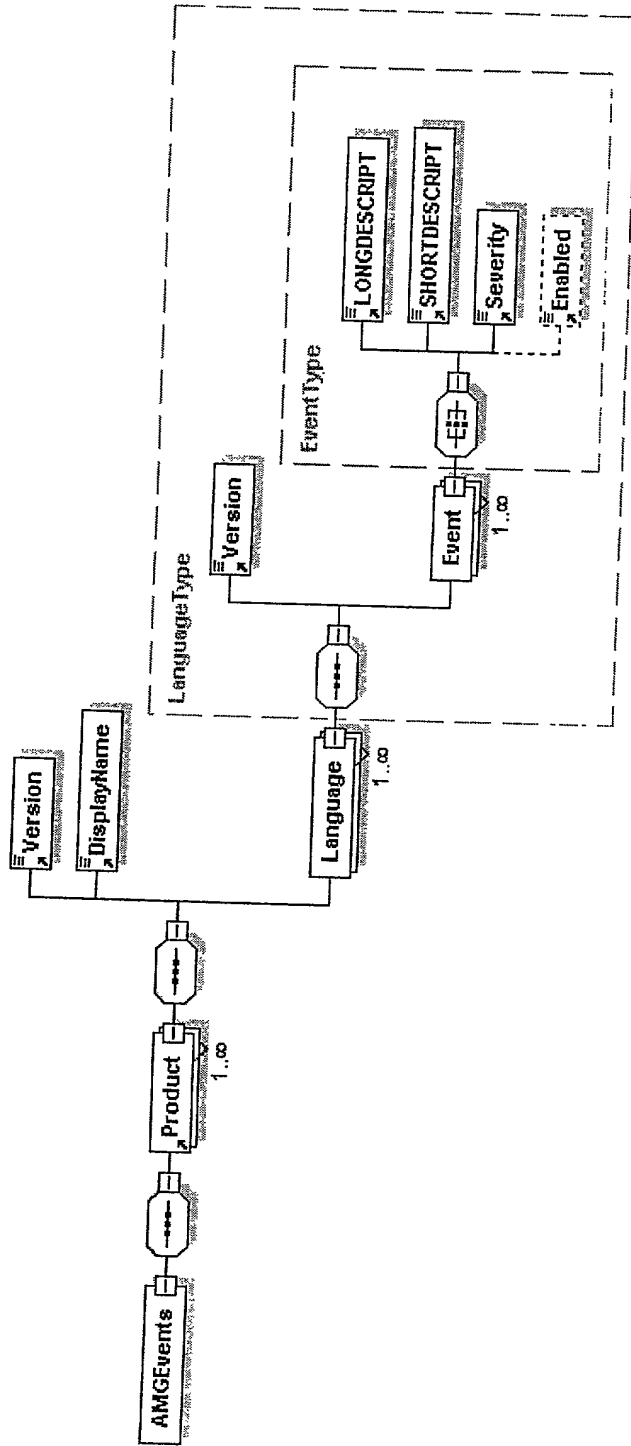

Generated with XMLSpy Schema Editor www.xmlspy.com

XSD Data

Fig. 21

<?xml version="1.0" encoding="UTF-8" ?>
<!-- edited with XML Spy v4.0.1 U (http://www.xmlspy.com) by Napalm.
(Napalm) -->
- <xs:schema targetNamespace="http://www.nai.com"
 xmlns="http://www.nai.com"
 xmlns:xs="http://www.w3.org/2001/XMLSchema"
 elementFormDefault="qualified">
 <xs:element name="DisplayName" type="xs:string" />
 <xs:element name="Enabled" type="xs:boolean" />
 - <xs:complexType name="EventType">
 - <xs:all>
 <xs:element ref="LONGDESCRIPT" />
 <xs:element ref="SHORTDESCRIPT" />
 <xs:element ref="Severity" />
 <xs:element ref="Enabled" minOccurs="0" />
 </xs:all>
 <xs:attribute name="id" type="xs:string" use="required" />
 </xs:complexType>
 - <xs:complexType name="LanguageType">
 - <xs:sequence>
 <xs:element ref="Version" />
 <xs:element name="Event" type="EventType"
 maxOccurs="unbounded" />
 </xs:sequence>
 <xs:attribute name="id" type="xs:string" use="required" />
 </xs:complexType>
 - <xs:element name="Product">
 - <xs:complexType>
 - <xs:sequence>
 <xs:element ref="Version" />
 <xs:element ref="DisplayName" />
 <xs:element name="Language" type="LanguageType"
 maxOccurs="unbounded" />
 </xs:sequence>
 <xs:attribute name="id" type="xs:string" use="required" />
 </xs:complexType>
 </xs:element>
 - <xs:element name="AMGEvents">
 - <xs:complexType>
 - <xs:sequence>
 <xs:element ref="Product" maxOccurs="unbounded" />
 </xs:sequence>
 </xs:complexType>
 </xs:element>
 <xs:element name="LONGDESCRIPT" type="xs:string" />
 <xs:element name="SHORTDESCRIPT" type="xs:string" />
 <xs:element name="Severity" type="xs:string" />
 <xs:element name="Version" type="xs:string" />
</xs:schema>

XSD Data

Fig. 22

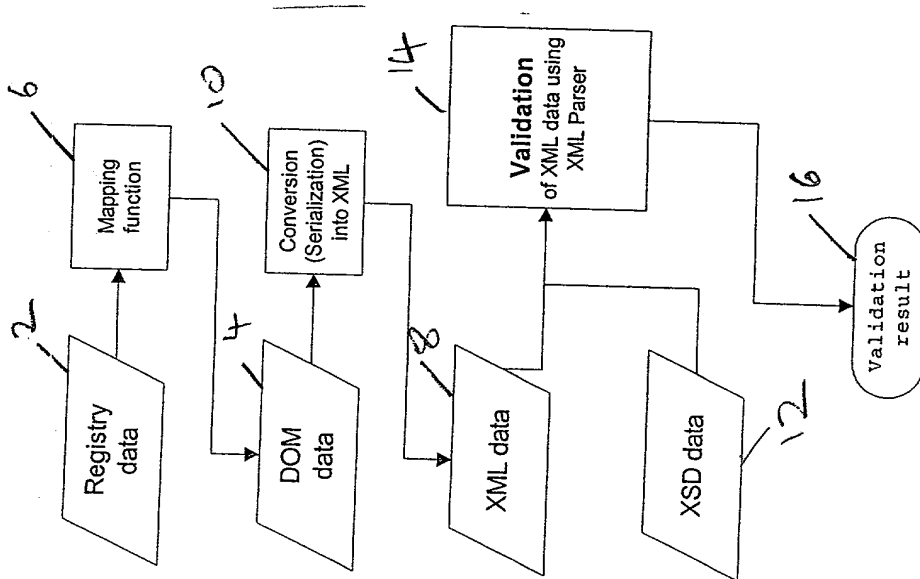


Fig. 23

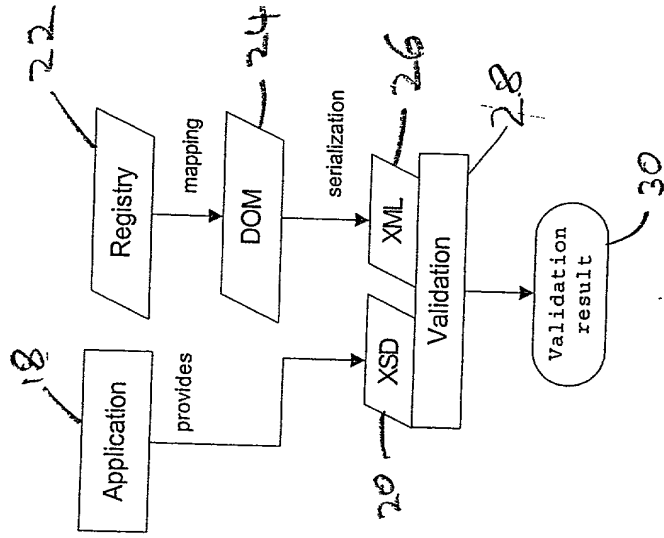



Fig. 24



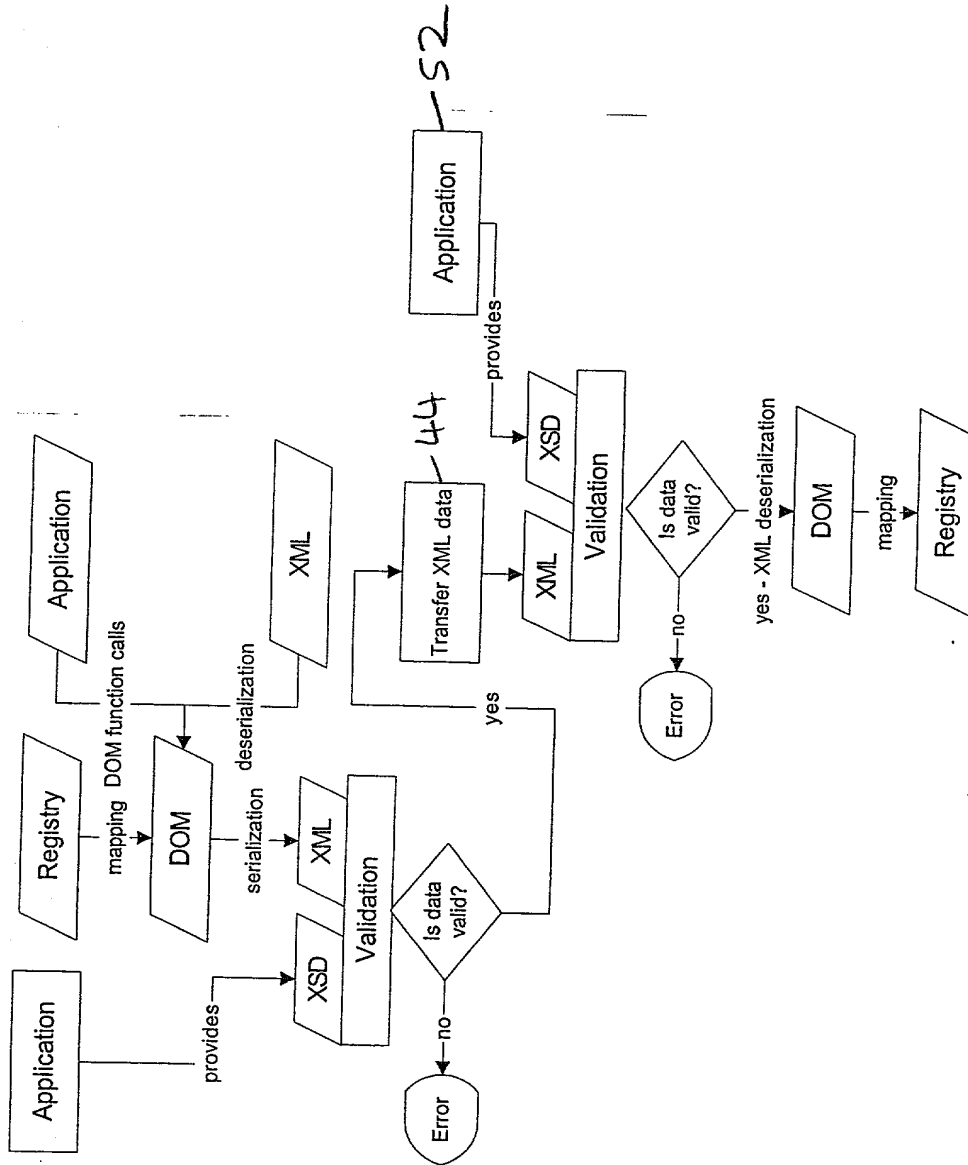


Fig. 27

2020051415.030702

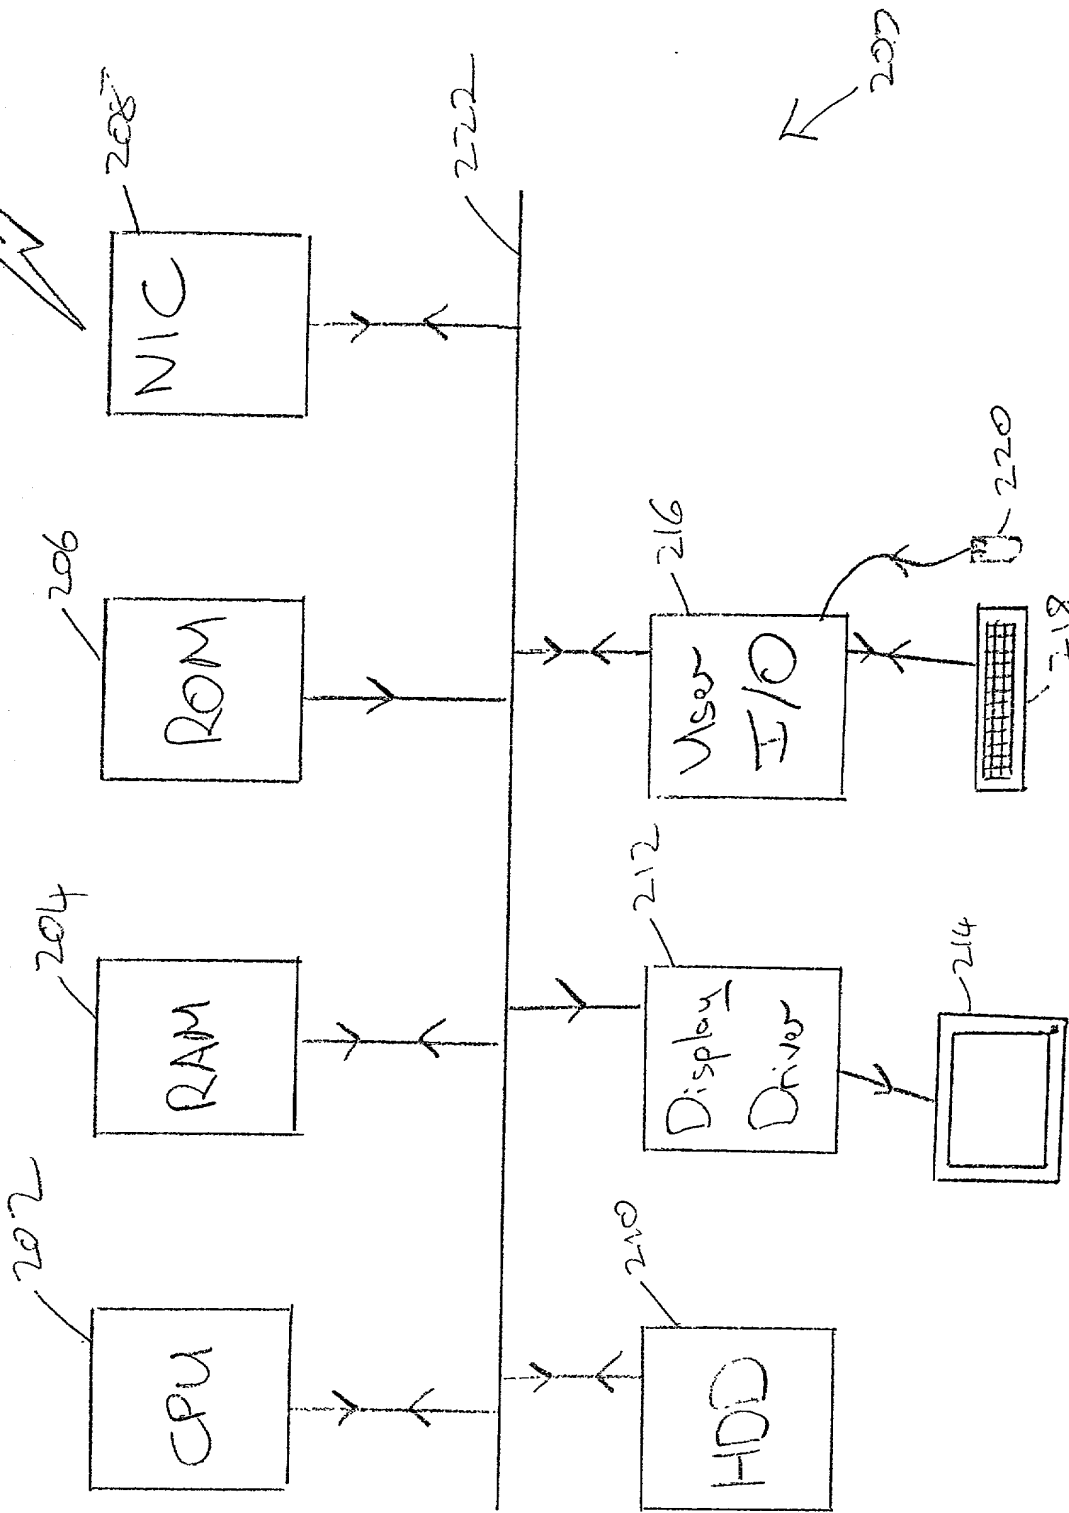


Fig. 28